

SPIN-DOWN™ & SEDIMENT TRAPPER™ FILTRATION SYSTEM

WATER FILTERS



Choose from the standard Spin-Down or Sediment Trapper models depending on amount of sediment being filtered. See back for more information. Protect your waterwell and plumbing equipment from damaging sediment and debris.



Spin-Down™ Technology

Water travels through the top of a spin-down filter and spins in a centrifugal motion causing the dirt and debris to be pushed to the outside of the housing, settling at the bottom.

Convenient Design


Our covers are made from a high impact polymer resin and are clear to provide a view of sediment buildup. Sediment can then be quickly and easily removed with a turn of the flush valve.

Easy Clean Capability

Many of Rusco's filter elements and cartridges are reusable by turning the ball valve at the bottom of the filter cover to the open position for a few seconds. This process makes cleaning your filter simple without the headaches of shutting off your water supply or taking the filter apart. Saving time and money on costly replacement filters and maintenance.

SMART SOLUTIONS FOR YOUR WATER FILTERING NEEDS










PAYS FOR ITSELF BY PROLONGING THE LIFE OF YOUR EQUIPMENT.







CHOOSING YOUR FILTER TYPE




- Both the Spin-Down and Sediment Trapper models offer the no tools convenience.
- · The Sediment Trapper allows for filtering larger volumes of sediment.
- · Centrifugal action in both models help trap sediment away from the screen.





YOUR WELL WATER SYSTEM WITH RUSCO

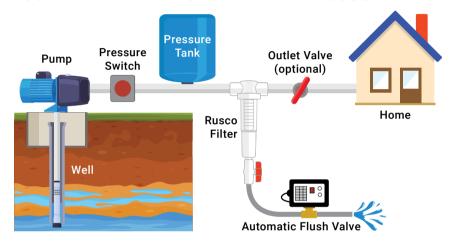

MESH/MICRON SIZING

MESH	MICRON**	INCHES
24	711	.028
30	533	.021
40	381	.015
60	254	.010
100	152	.006
140	104	.004
200	74	.0029
250	61	.0024
500	30	.0012
1000	15	.0006

^{*}All mesh sizes are available in stainless steel except 24 and 40 mesh.

ORDERING INFORMATION

SPIN-DOWN™ MODELS

MODEL NO.	MIN*./MAX. FLOW	INLET/OUTLET	LENGTH	WIDTH
3/4-#-F	1-25 GPM	3/4" NPT Female	11-3/8"	5"
1-#-F	1-25 GPM	1" Slip	11-3/8"	5"
1-1/2-#-F	10-50 GPM	1-1/2" Slip	15-3/8"	5-1/4"
2-#-F	18-100 GPM	2" Slip	17-7/8"	5-1/2"
CF 1-1/2-#-F	10-50 GPM	1-1/2" Slip	16-5/8"	5-1/4"
CF 2-#-F	18-100 GPM	2" Slip	18-7/8"	5-1/2"
L 1-1/2-# **	0-50 GPM	1-1/2" Slip	14-1/4"	5-1/2"
L2-#**	0-100 GPM	2" Slip	18"	5-1/2"

* Minimum Flow needed for Spin-Down™ action

** L-Filters do not produce Spin-Down™ action

SEDIMENT TRAPPER™ MODELS

MODEL NO.	MIN*./MAX. FLOW	INLET/ OUTLET	LENGTH	WIDTH
3/4-#ST-F	1-25 GPM	3/4" NPT Female	14-3/8"	5"
1-#ST-F	1-25 GPM	1" Slip	14-3/8"	5"
1-1/2-# ST-F	10-50 GPM	1-1/2" Slip	15-3/8"	5-1/4"
2-# ST-F	18-100 GPM	2" Slip	17-7/8"	5-1/2"
CF 1-1/2-# ST-F	10-50 GPM	1-1/2" Slip	16-5/8"	5-1/4"
CF 2-# ST-F	18-100 GPM	2" Slip	18-7/8"	5-1/2"

- **ORDERING NOTES:**
- # indicates mesh size when ordering
 For stainless-steel element, add "SS" after mesh size (after "ST" on Sediment Trapper models)
- For chemical resistant cover, add "CR" prior to "F"
- For white cover, add "W" prior to "F



Scan for more information about Rusco's sediment filters



Rusco is a leading manufacturer of high quality, efficient, water sediment filtration products and accessories. Rusco filters are available throughout the United States and in many major international locations. We strive to always exceed our customers' expectation of quality and service, and to provide the most effective solutions.



^{**}Micron conversions are approximate.